


# MICROPHONE CABLE


## JC-2222

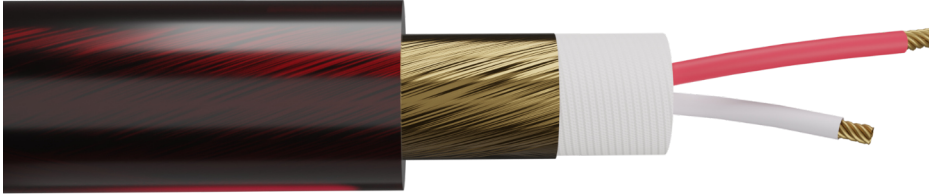

- 24AWG conductor size
- OFC spiral shield
- PVC jacket

Item	JC-2222
Conductor	0.22mm <sup>2</sup> 24AWG OFC
Shield	64/85/96 OFC spiral shield
OD	6.2mm
Color	■   ■   ■   ■   ■
Peak temperature	-20°C to 70°C

## JC-2201

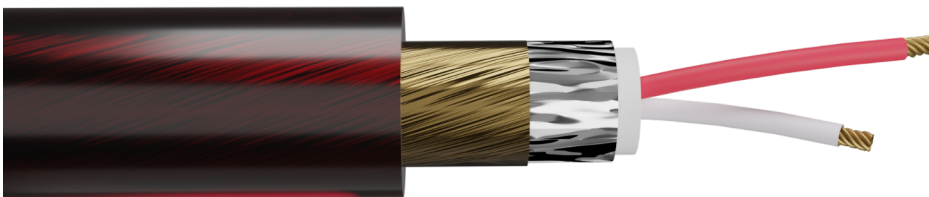

- 24AWG conductor size
- Aluminum foil + OFC spiral shield
- PVC jacket

Item	JC-2201
Conductor	0.22mm <sup>2</sup> 24AWG OFC
Shield	64/85/96 OFC spiral shield + Aluminum foil
OD	6.2mm
Color	■   ■   ■   ■   ■
Peak temperature	-20°C to 70°C

# MICROPHONE CABLE

## JC-2204



- 22AWG conductor size
- OFC braid shield
- PVC jacket

Item	JC-2204
Conductor	0.35mm <sup>2</sup> 22AWG OFC
Shield	128/144/160 OFC braid shield
OD	6.7mm
Color	■ ■ ■ ■ ■
Peak temperature	-20°C to 70°C

## JC-2241



- 24AWG conductor size
- OFC spiral shield
- PVC jacket

Item	JC-2241
Conductor	0.22mm <sup>2</sup> 24AWG OFC
Shield	25 OFC spirial shield
OD	3.2mm
Color	■ ■ ■
Peak temperature	-20°C to 70°C

SPEAKER CABLE


JC-1502



- 18AWG conductor size
- HDPE insulation
- PVC jacket

Item	JC-1502
Conductor	0.83mm <sup>2</sup> 18AWG OFC
Shape	□ ○ ○ □
OD	3.5mm
Color	■ ■
Peak temperature	-20°C to 70°C

JC-2133

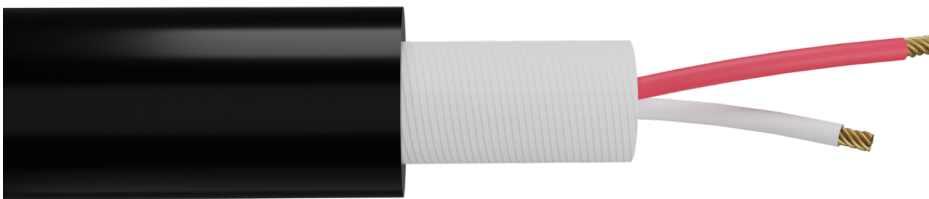

- multiple conductor size
- PVC jacket

Item	JC-2133
Conductor	0.75/1.0/1.5/2.0/2.5/4.0mm <sup>2</sup> OFC
Insulation	Nonwoven fabric
OD	7.0-11.5mm
Color	■ ■
Peak temperature	-20°C to 70°C

LIGHTING CABLE/MULTICORE CABLE

JC-2052



- 16AWG conductor size
- Enhancing the tensile strength
- PVC jacket

Item	JC-2052
Conductor	0.15/0.25mm <sup>2</sup> OFC
Tension cable	Nylon fiber
OD	8-10mm
Color	■
Peak temperature	-20°C to 70°C

JC-2701



- 27AWG conductor size
- Aluminum foil shield
- PVC jacket

Item	JC-2701
Conductor	8 cores-24 cores 0.10mm <sup>2</sup> OFC
Shield	Aluminum foil shield
OD	15mm
Color	■
Peak temperature	-20°C to 70°C